




Range

The Concept

Retractable aluminium housing
with connections for power and data.
Easy to install.

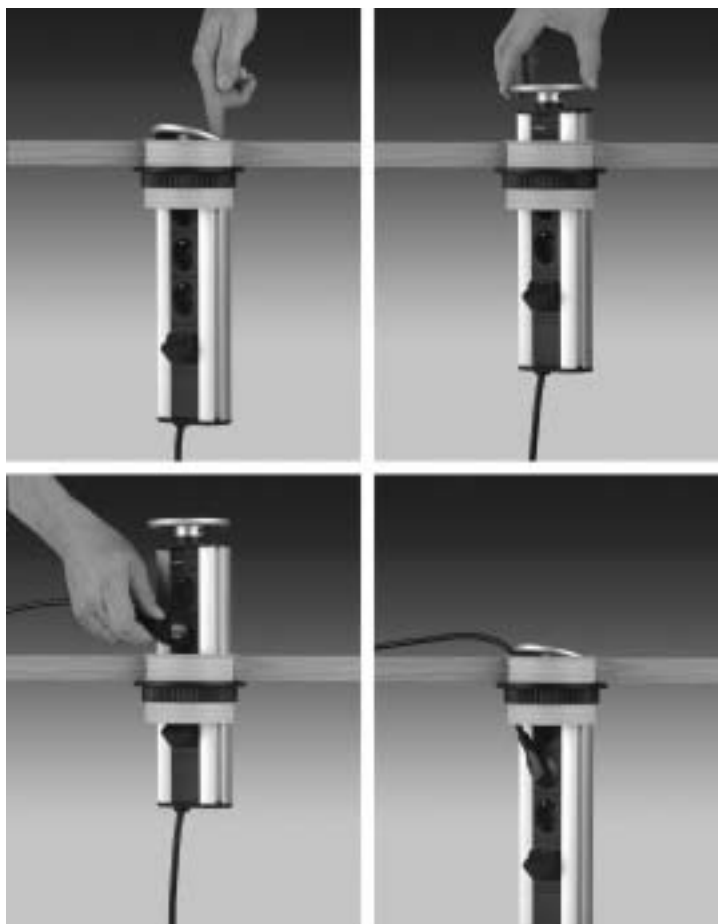

Important order information

The goods are not marked with EAN-codes
If required, please order separately.

Subject to technical changes

Article	Type	EAN-code	g/pce	Picture
<p>EVoline® Port silver anodized aluminium profile; 2 sockets according to VDE *; supply cable 3,0 m; for work tops up to max. 50 mm thick, mounting hole Ø 102 mm</p>				
Rocking cover and sleeve made of plastic, lacquered in silver colour **	931.00.033	4 044657 000729	900	
Rocking cover and sleeve made of plastic, black ***	931.00.052	4 044657 000736	900	
Rocking cover made of solid stainless steel in CD-design and sleeve made of plastic, lacquered in tone ***	931.00.311	4 044657 000743	1200	
Rocking cover made of solid stainless steel in CD-design and sleeve made of plastic, lacquered in tone; NIGHTLIGHT-Effect from 2 blue LEDs under rocking cover; illuminated ON/OFF-switch ***	931.00.312	4 044657 000750	1220	

<p>EVoline® Port silver anodized aluminium profile; 3 sockets according to VDE *; supply cable 3,0 m; for work tops up to max. 50 mm thick, mounting hole Ø 102 mm</p>				
Rocking cover and sleeve made of plastic, lacquered in silver colour **	931.00.001	4 044657 000682	1000	
Rocking cover and sleeve made of plastic, black ***	931.00.050	4 044657 000767	1000	
Rocking cover made of solid stainless steel in CD-design and sleeve made of plastic, lacquered in tone ***	931.00.216	4 044657 000699	1300	
Rocking cover made of solid stainless steel in CD-design and sleeve made of plastic, lacquered in tone; NIGHTLIGHT-Effect from 2 blue LEDs under rocking cover; illuminated ON/OFF-switch ***	931.00.313	4 044657 000774	1320	




EVoline® Port is available in following international socket configurations:



* Sockets with touch guard

** Stock, deliverable at short notice

*** deliverable upon request, ask for delivery times

Article	Type	EAN-code	g/pce	Picture
<p>EVOLine® Port CUISINE silver anodized aluminium profile; 3 sockets according to VDE *; supply cable 2,5 m; plug loosely enclosed; for work tops up to max. 50 mm thick, mounting hole Ø 102 mm</p> <p>Rocking cover made of plastic, lacquered in silver colour and sleeve made of plastic, grey **</p>	931.00.006	 4 044657 002358	1000	
<p>EVOLine® Port DATA silver anodized aluminium profile; 2 sockets according to VDE *; supply cable 3,0 m; 2 modular couplings for patch cable RJ 45 to RJ 45, switched 1:1, CAT 5 screened; for work tops up to max. 50 mm thick, mounting hole Ø 102 mm</p> <p>Rocking cover and sleeve made of plastic, lacquered in silver colour **</p> <p>Rocking cover and sleeve made of plastic, black ***</p> <p>Rocking cover made of solid stainless steel in CD-design and sleeve made of plastic, laquered in tone ***</p> <p>Rocking cover made of solid stainless steel in CD-design and sleeve made of plastic, laquered in tone; NIGHTLIGHT-Effect from 2 blue LEDs under rocking cover; illuminated ON/OFF-switch ***</p>	931.00.314	 4 044657 000781	980	
	931.00.315	 4 044657 000798	980	
	931.00.316	 4 044657 000804	1250	
	931.00.317	 4 044657 000811	1265	

EVOLine® Port is available in following international socket configurations:



* Sockets with touch guard
 ** Stock, deliverable at short notice
 *** deliverable up on request, ask for delivery times

Article	Type	EAN-code	g/pce	Picture
EVoline® Port DATA				
silver anodized aluminium profile; 3 sockets according to VDE *; supply cable 3,0 m; 2 modular couplings for patch cable RJ 45 to RJ 45, switched 1:1, CAT 5 screened; for work tops up to max. 50 mm thick, mounting hole Ø 102 mm				
Rocking cover and sleeve made of plastic, lacquered in silver colour **	931.00.318	 4 044657 000828	1065	
Rocking cover and sleeve made of plastic, black ***	931.00.319	 4 044657 000835	1065	
Rocking cover made of solid stainless steel in CD-design and sleeve made of plastic; lacquered in tone ***	931.00.320	 4 044657 000842	1350	
Rocking cover made of solid stainless steel in CD-design and sleeve made of plastic; lacquered in tone NIGHTLIGHT effect from 2 blue LEDs under rocking cover; illuminated ON/OFF switch ***	931.00.321	 4 044657 000859	1365	
EVoline® Port MULTIMEDIA				
silver anodized aluminium profile; 2 sockets according to VDE *; supply cable 3,0 m; 2 modular couplings for patch cable RJ 45 to RJ 45, switched 1:1, CAT5 screened; 1 VGA 15-pin. HDD jack; 2 audio jacks 3,5 mm; 3,0 meter cables with plugs; for work tops up to max. 50 mm thick, mounting hole Ø 102 mm				
Rocking cover and sleeve made of plastic, lacquered in silver colour **	931.00.322	 4 044657 000866	1485	
Rocking cover and sleeve made of plastic, black ***	931.00.323	 4 044657 000873	1485	
Rocking cover made of solid stainless steel in CD-design and sleeve made of plastic; lacquered in tone ***	931.00.324	 4 044657 000880	1750	
Rocking cover made of solid stainless steel in CD-design and sleeve made of plastic; lacquered in tone; NIGHTLIGHT effect from 2 blue LEDs under rocking cover; illuminated ON/OFF switch ***	931.00.325	 4 044657 000897	1765	

EVoline® Port is available in following international socket configurations:






* Sockets with touch guard
** Stock, deliverable at short notice
*** deliverable up on request, ask for delivery times

EVOLine® Port individual.







Simply combine the modules of your choice in the basic profile!

Thanks to the modular design of the EVOLine® Port, you may create individual models according to your requirements.









Article	Type	EAN-code/Comment	Picture
<p>EVOLine® Port Empty basic profile silver anodized aluminium profile; with rocking cover and sleeve made of plastic, lacquered in silver or black; <i>Please state colour when ordering</i></p>			
<p>if mounted with sockets incl. 3,0 m supply cable *</p>	933.01.830	empty basic profile only available in combination with modules	
<p>Supply cable extension **</p>	933.01.740	per meter	
<p>EVOLine® Port Empty basic profile stainless steel design silver anodized aluminium profile; with rocking cover made of solid stainless steel in CD-design and sleeve made of plastic, lacquered in tone;</p>			
<p>if mounted with sockets incl. 3,0 m supply cable *</p>	933.01.360	empty basic profile only available in combination with modules	
<p>Supply cable extension **</p>	933.01.740	per meter	
<p>EVOLine® Port Empty basic profile Nightlight-package silver anodized aluminium profile; with rocking cover made of solid stainless steel in CD-design and sleeve made of plastic, lacquered in tone; 2 blue LEDs under rocking cover; ON/OFF-switch (sockets+LED) illuminated; if mounted with sockets incl. 3,0 m supply cable *</p>			
<p>Supply cable extension **</p>	933.01.250	empty basic profile only available in combination with modules	
<p>Supply cable extension **</p>	933.01.740	per meter	

* With plug configured according to relevant country
Cable length measured from termination in profile
** For all country configurations

Please note:
Custom-made designs are subject to
a delivery period of approx. 4 weeks.


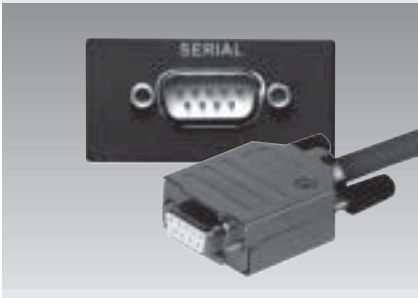



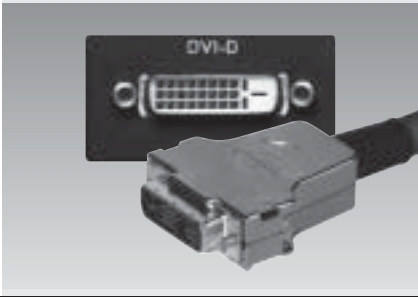






Article	Type	EAN-code/Comment	Picture
<p>Socket, VDE, Germany, Austria, 60°</p> <p>black; Assembly width 50 mm</p>	933.01.050	module can only be ordered already assembled	
<p>Socket, France/Belgium, Poland, 60°</p> <p>black; Assembly width 50 mm</p>	933.01	module can only be ordered already assembled	
<p>Socket, Switzerland 10 A, 60°</p> <p>black; Assembly width 50 mm</p>	933.01.110	module can only be ordered already assembled	
<p>Socket, Switzerland 16 A, 60°</p> <p>black; Assembly width 50 mm</p>	933.01.070	module can only be ordered already assembled	
<p>Socket, Denmark, standard, 60°</p> <p>black; Assembly width 50 mm</p>	933.01.080	module can only be ordered already assembled	
<p>Socket, Denmark, IT-coded, 60°</p> <p>black; Assembly width 50 mm</p>	933.01.090	module can only be ordered already assembled	

Please note:
Custom-made designs are subject to
a delivery period of approx. 4 weeks.

Article	Type	EAN-code/Comment	Picture
Socket, United Kingdom black; Assembly height 50 mm	933.00.270	module can only be ordered already assembled	
Single fuse, United Kingdom, 3,15 A Assembly height 50 mm	933.01.120	module can only be ordered already assembled	
Single fuse, United Kingdom, 5 A Assembly height 50 mm	933.01.130	module can only be ordered already assembled	
Socket, Italy, 10 A / 16 A black; Assembly height 50 mm	933.00.260	module can only be ordered already assembled	
Computer connection VGA 15-pin HDD jack with screw-locking mechanism flexible connection lead, halogenfree and flame resistant, up to 4.000 volt EMV-proof, Impedance of 75 ohms, low attenuation factor; with 3,0 m cable * and plug; Assembly height 25 mm	933.00.810	 4 044657 002082 per meter	
Cable extension	933.01.570		
Computer connection VGA 15-pin HDD jack with screw-locking mechanism flexible connection lead, halogenfree and flame resistant, up to 4.000 volt EMV-proof, Impedance of 75 ohms, low attenuation factor; with 3,0 m cable * on 5x BNC RGB HV; Assembly height 25 mm	933.01.560	 4 044657 002365 per meter	
Cable extension	933.01.690		












* Cable length measured from termination in profile.

Please note:
Custom-made designs are subject to
a delivery period of approx. 4 weeks.

Article	Type	EAN-code/Comment	Picture
<p>Computer connection serial 9-pin D-SUB plug</p> <p>with screw-locking mechanism; flexible connection lead, halogenfree and flame resistant. Up to 4.000 volt EMV-proof; with 3,0 m cable * and jack; Assembly height 25 mm</p> <p>Cable extension</p>	933.00.870 933.01.630	 4 044657 002099 per meter	
<p>Computer connection Interface for keyboard/mouse</p> <p>2 x 6-pin Mini DIN **-connection (PS/2); flexible connection lead, bend radius 42mm; optimal performance between -20 °C and +70 °C; with 3,0 m cable * and plug; Assembly height 25 mm</p> <p>Cable extension</p>	933.00.880 933.01.640	 4 044657 002105 per meter	
<p>Computer connection DVI-D interface for digital connection</p> <p>Jack with screw-lock; low attenuation factor; cable halogenfree and flame resistant; with 3,0 m cable * and plug; Assembly height 25 mm</p> <p>Cable extension</p>	933.00.850 933.01.610	 4 044657 002112 per meter	
<p>Computer connection DVI-A interface for analogue connection</p> <p>low attenuation factor; cable halogenfree and flame resistant; with 3,0 m cable * and plug; Assembly height 25 mm</p> <p>Cable extension</p>	933.00.860 933.01.620	 4 044657 002129 per meter	
<p>Computer connection USB type A</p> <p>Connection of standard commercial USB -appliances; Cable CAT 7 halogenfree; Transmission bandwidth 900 Mhz; with 3,0 m cable * and plug; Assembly height 25 mm</p> <p>Cable extension</p>	933.01.040 933.01.680	 4 044657 002136 per meter	
<p>Audio connection Inputs L / R for stereo cinch connection</p> <p>with high quality gold-plated plugs; optimal performance between -20 °C and +70 °C; with 3,0 m cable * and plug; Assembly height 25 mm</p> <p>Cable extension</p>	933.00.830 933.01.590	 4 044657 002143 per meter	







* Cable length measured from termination in profile.
** DIN - German Industrial Norm

Please note:
Custom-made designs are subject to
a delivery period of approx. 4 weeks.







Article	Type	EAN-code/Comment	Picture
<p>Audio connection Inputs 1 / 2 for stereo</p> <p>3,5 mm jack; with high quality gold-plated plugs; optimal performance between -20 °C and +70 °C; with 3,0 m cable * and plug; Assembly height 25 mm</p> <p>Cable extension</p>	<p>933.00.840</p> <p>933.01.600</p>	 <p>4 044657 002150</p> <p>per meter</p>	
<p>Audio connection Input 1 for stereo</p> <p>3,5 mm jack; with high quality gold-plated plugs; optimal performance between -20 °C and +70 °C; with 3,0 m cable * and plug; Assembly height 25 mm</p> <p>Cable extension</p>	<p>933.00.910</p> <p>933.01.670</p>	 <p>4 044657 002167</p> <p>per meter</p>	
<p>Video connection 4-pin mini-DIN ** (S-VHS) and cinch video (VHS)</p> <p>with high quality gold-plated plugs; Impedance 75 ohm at low attenuation factors; with 3,0 m cable * and plugs; Assembly height 25 mm</p> <p>Cable extension</p>	<p>933.00.820</p> <p>933.01.580</p>	 <p>4 044657 002174</p> <p>per meter</p>	
<p>Video connection Cinch video (VHS) connection</p> <p>with high quality gold-plated plug; Impedance 75 ohm at low attenuation factors; with 3,0 m cable * and plugs; Assembly height 25 mm</p> <p>Cable extension</p>	<p>933.00.890</p> <p>933.01.650</p>	 <p>4 044657 002181</p> <p>per meter</p>	
<p>Video connection field 4-pin mini-DIN ** (S-VHS) connection</p> <p>with high quality gold-plated plug; Impedance 75 ohm at low attenuation factors; with 3,0 m cable * and plugs; Assembly height 25 mm</p> <p>Cable extension</p>	<p>933.00.900</p> <p>933.01.660</p>	 <p>4 044657 002198</p> <p>per meter</p>	
<p>Residual Current Device switch, Rated current 25 amp, Sensitivity 30 ma</p> <p>(RCD) Assembly height 100 mm</p>	<p>933.00.370</p>	<p>module can only be ordered already assembled</p>	

* Cable length measured from termination in profile.
** DIN - German Industrial Norm






Please note:
Custom-made designs are subject to
a delivery period of approx. 4 weeks.

Article	Type	EAN-code/Comment	Picture
<p>Circuit protection switch, 10 amp</p> <p>(MCB) Assembly width 100 mm</p>	933.01.140	module can only be ordered already assembled	
<p>Circuit protection switch, 13 amp</p> <p>(MCB) Assembly width 100 mm</p>	933.01.150	module can only be ordered already assembled	
<p>Circuit protection switch, 16 amp</p> <p>(MCB) Assembly width 100 mm</p>	933.00.400	module can only be ordered already assembled	
<p>Interference Filter with integrated Overvoltage Protection, Printed in German</p> <p>$U_N = 230V\sim/50\text{ Hz}$ $I_N = 16A$ $I_{SN} = 2,5\text{ kA}$</p> <p>Assembly width 100 mm</p>	933.00.750	module can only be ordered already assembled	
<p>Interference Filter with integrated Overvoltage Protection, Printed in English</p> <p>$U_N = 230V\sim/50\text{ Hz}$ $I_N = 16A$ $I_{SN} = 2,5\text{ kA}$</p> <p>Assembly width 100 mm</p>	933.00.760	module can only be ordered already assembled	
<p>Interference Filter with integrated Overvoltage Protection, Printed in French</p> <p>$U_N = 230V\sim/50\text{ Hz}$ $I_N = 16A$ $I_{SN} = 2,5\text{ kA}$</p> <p>Assembly width 100 mm</p>	933.01.160	module can only be ordered already assembled	

Please note:
Custom-made designs are subject to
a delivery period of approx. 4 weeks.





Article	Type	EAN-code/Comment	Picture
<p>Master/slave switch</p> <p>To switch downstream sockets; upstream master socket grey, downstream slave socket black, Switching threshold : 50 mA; Assembly height 150 mm</p>	933.01.320	module can only be ordered already assembled	
<p>ON/OFF switch, Illuminated in orange</p> <p>Assembly height 50 mm</p>	933.00.010	module can only be ordered already assembled	
<p>ON/OFF switch Stainless steel design</p> <p>only to switch the nightlight-effect-LEDs; Assembly height 50 mm</p>	933.01.180	module can only be ordered already assembled	
<p>Angled output for 2 Telephone and data sockets (Panduit) RJ 45 CAT 5 screened</p> <p>Assembly height 50 mm</p>	933.01.190	module can only be ordered already assembled, jacks as assembly set loosely attached	
<p>Angled output for 2 Telephone and data sockets (Panduit) RJ 45 CAT 5 screened</p> <p>with data cables 3,0 m; Assembly height 50 mm</p> <p>Cable extension</p>	933.01.210 933.01.750	module can only be ordered already assembled per meter / for 2 data cables	
<p>Angled output for 2 Telephone and data sockets (empty)</p> <p>Assembly height 50 mm</p>	933.00.310	module can only be ordered already assembled	

Please note:
Custom-made designs are subject to a delivery period of approx. 4 weeks.










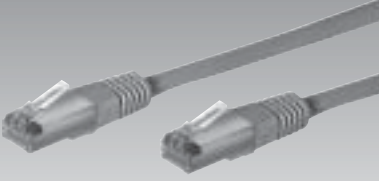


Article	Type	EAN-code/Comment	Picture
<p>Angled output for 2 Telephone and data sockets (Reichle & De-Massari) RJ45 CAT 5 screened *</p> <p>With data cables 3,0 m; Assembly height 50 mm</p> <p>Cable extension</p>	<p>933.01.220</p> <p>933.01.750</p>	<p>module can only be ordered already assembled</p> <p>per meter / for 2 data cables</p>	
<p>Angled output for 2 Telephone and data sockets (Reichle & De-Massari) RJ45 CAT 6 screened</p> <p>With data cables 3,0 m; Assembly height 50 mm</p> <p>Cable extension</p>	<p>933.01.230</p> <p>933.01.780</p>	<p>module can only be ordered already assembled</p> <p>per meter / for 2 data cables</p>	
<p>Angled outlet for 2 modular couplings for patch cable, RJ45 to RJ45, 1:1, CAT 5 screened</p> <p>Assembly height 50 mm</p>	<p>933.01.240</p>	<p>module can only be ordered already assembled</p>	
<p>TAE telephone socket, NFN</p> <p>without connection cable; Assembly height 50 mm</p>	<p>933.00.290</p>	<p>module can only be ordered already assembled</p>	
<p>TV-radio coaxial socket</p> <p>without connection cable; Assembly height 50 mm</p>	<p>933.00.300</p>	<p>module can only be ordered already assembled</p>	

* complies with CAT 5e

Please note:
Custom-made designs are subject to a delivery period of approx. 4 weeks.

Article	Type	EAN-code/Comment	Picture
Blank plate Assembly height 25 mm	933.00.920	module can only be ordered already assembled	
Blank plate Assembly height 50 mm	933.00.130	module can only be ordered already assembled	
Blank plate Assembly height 75 mm	933.00.550	module can only be ordered already assembled	
Blank plate Assembly height 100 mm	933.00.110	module can only be ordered already assembled	

Please note:
Custom-made designs are subject to
a delivery period of approx. 4 weeks.

Article	Type	EAN-code/Comment	Picture
<p>Hole saw</p> <p>for mounting holes Ø 102 mm in worktops up to 47 mm thick; incl. center drill</p>	990.90.170	 4 044657 000903	
<p>Cable aperture Port</p> <p>in EVoline® Port-Design; Rocking cover and sleeve made of plastic, lacquered in silver colour</p>	931.00.253	 4 044657 000910	
<p>Cable aperture Port</p> <p>in EVoline® Port-Design; Rocking cover and sleeve made of plastic, black</p>	931.00.326	 4 044657 000927	
<p>Cable aperture Port</p> <p>in EVoline® Port-Design; Rocking cover made of solid stainless steel and sleeve made of plastic, lacquered in tone</p>	931.00.327	 4 044657 000934	
<p>Patch Cable (telephone/data)</p> <p>CAT 5 screened with 2 RJ 45 plugs and bend protection, length 3,0 m, grey</p>	990.90.110	 4 044657 000521	
<p>Patch Cable (telephone/data)</p> <p>CAT 5 screened with 2 RJ 45 plugs and bend protection, length 5,0 m, grey</p>	990.90.115	 4 044657 000538	

Please note:
Custom-made designs are subject to
a delivery period of approx. 4 weeks.

www.schulte.com

Schulte Elektrotechnik
GmbH & Co KG

Mailbox 2732/2708
D-58477 Lüdenscheid

Jüngerstraße 21
D-58515 Lüdenscheid

Phone +49 (0) 2351 / 94 81-0
Fax +49 (0) 2351 / 4 26 58
mail info@schulte.com

www.schulte.com